

DECLARATION OF PERFORMANCE N. CPR-IT1/0494

- 1) Unique identification code of the product-type: **KERAFLEX MAXI S1 ZERO (grey)**
- 2) Intended uses: **Improved cementitious adhesive for internal and external tiling on floors and walls**
- 3) Manufacturer: **MAPEI S.p.A. – Via Cafiero, 22 – 20158 Milan – Italy - www.mapei.it**
- 4) Systems of AVCP: **System 3**
- 5) Harmonized standards: **EN 12004:2007+A1:2012**

Notified bodies: **LGAI TECHNOLOGICAL CENTER, S. A.(Applus+), N. 0370**
MPA Dresden GmbH, N. 0767

- 6) Performances declared:


Essential characteristics	Performances
Reaction to fire: Bond strength: Durability of bond strength against: - climate/heat ageing action: - water/humidity action: - freeze-thaw cycles: Release of dangerous substances:	Class A2_{FL}-s1 / A2-s1, d0 expressed as: - initial tensile adhesion strength $\geq 1,0 \text{ N/mm}^2$ expressed as: - tensile adhesion strength after heat ageing $\geq 1,0 \text{ N/mm}^2$ - tensile adhesion strength after water immersion $\geq 1,0 \text{ N/mm}^2$ - tensile adhesion strength after freeze-thaw cycles $\geq 1,0 \text{ N/mm}^2$ NPD

The performance of the product identified above is in conformity with the set of declared performances

This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by: **Santino Giglio – Corporate Quality Management**

Milan, 05/07/2023

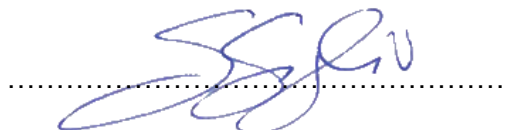

REACH information: the information referred to Article 31 or, as appropriate, to Article 33 of the REACH Regulation (EC) no. 1907/2006 and following amendments are indicated in the safety data sheet that MAPEI makes available on the website along with this current Declaration of Performance.

DoP in Pdf format are available in the Mapei website.

Revision 2 notes:	Product unchanged, added colour
--------------------------	--

KERAFLEX MAXI S1 ZERO (grey)

CE MARKING

Annex to DoP N. CPR-IT1/0494



0370, 0767



Via Cafiero, 22 – 20158 Milano (Italy)

www.mapei.it

15

CPR-IT1/0494

EN 12004

KERAFLEX MAXI S1 ZERO (grey)

Improved cementitious adhesive for internal and external tiling on floors and walls

Reaction to fire:

Bond strength:

Durability of bond strength against:

- climate/heat ageing action:
- water/humidity action:
- freeze-thaw cycles:

Release of dangerous substances:

Class A2_{FL}-s1 / A2-s1, d0

expressed as:

- initial tensile adhesion strength $\geq 1,0 \text{ N/mm}^2$

expressed as:

- tensile adhesion strength after heat ageing $\geq 1,0 \text{ N/mm}^2$
- tensile adhesion strength after water immersion $\geq 1,0 \text{ N/mm}^2$
- tensile adhesion strength after freeze-thaw cycles $\geq 1,0 \text{ N/mm}^2$

NPD

Note:

MAPEI supplies the current annex along with the DoP to make the consultancy of the CE marking easier for the international clients. The enclosed CE marking can be slightly different compared to the one printed on the relevant packaging or documentation because of:

- NPD (No Performance Determined) values can be omitted by the CE marking,
- graphic adaptations due to lack of space on the packaging or printing methods used,
- different language (the same packaging can be shared by several countries),
- the product is already in stock when the updating of the CE marking is implemented,
- printing mistakes.